


Connection example NMEA2000

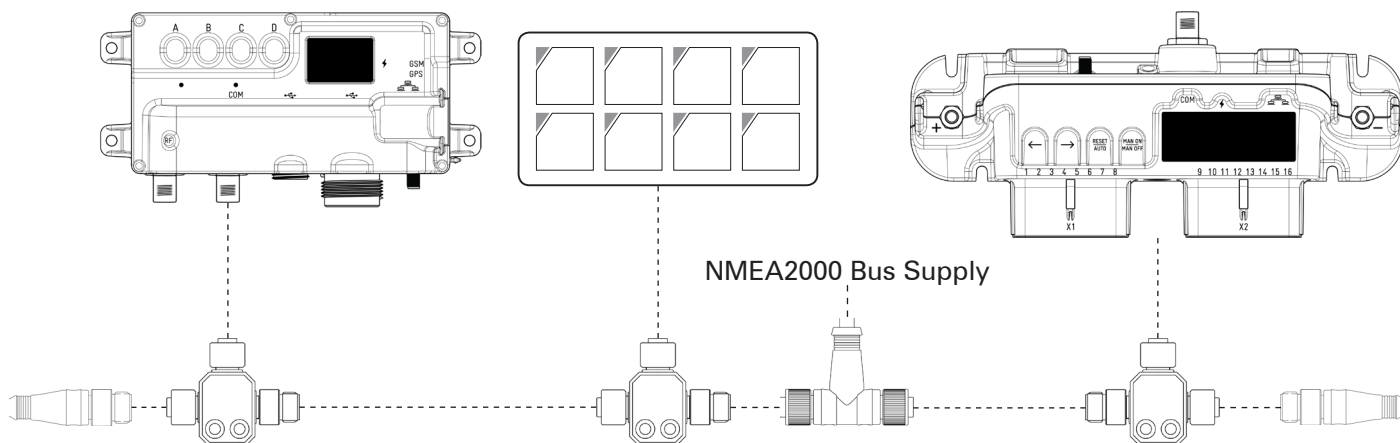

Specifications

Communication: CAN-bus NMEA 2000

Power supply: Power consumption
max/average 300mA/0,25mA
Supply voltage 9–32VDC

Connector:
NMEA 2000 Micro 5pin M12 Male
Power supply Micro 8pin M12 Male
USB Slave Mini USB
USB Host USB A
Ethernet RJ45
Sim Card Sim Card Holder
Antenna SMA Female

Ambient temp.: -20 to +70 degrees Celsius


Enclosure: Ingress Protection IP65

Dimensions: 173 x 89 x 32,5 mm

Regulation comp.: ABYC, RoHS

Weight: 0,2 kg

Dimensions

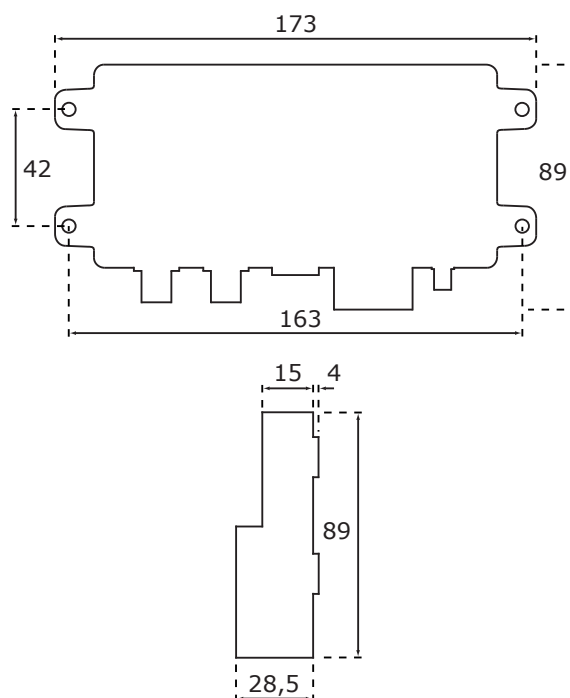

(mm) drawing is not to scale

Articles

2051011 MCU-11 Master with CAN and USB slave interface

2051040 MCU-11 Master with CAN, USB slave and GSM interface



Version.2012.11.08

Trigentic AB
Kasenabbvägen 65
SE-451 50 Uddevalla
Sweden

Support
Phone: +46 522-44 22 22
E-mail: support@empirbus.com
Web: www.empirbus.com

MEMBER
ABYC[®]
Setting Standards for Safer Boating